




MODEL 812




Model 812

A cost-effective way to add security, pest control, and ventilation to your facility.



.023" 12 x 12 mesh



.011" 30 x 30 mesh

Model 812 Applications

- Food and food product warehouses
- Health and beauty warehouses and manufacturing facilities
- Warehouses and manufacturing facilities in areas prone to insect infestations
- Paper mills

FEATURES

- Anodized aluminum frame construction.
- Stainless steel wire mesh that meets Federal Specification STD A-A-1037B.
- .023" 12 x 12 mesh for security doors.
- .011" 30 x 30 mesh for food applications.
- The advantages of visibility and natural air flow without the problems created by insects.





CLOPAY MODEL 812

UPWARD-ACTING SCREEN DOOR SYSTEM

Quality Assurance – The doors shall be aluminum framed sectional overhead type as manufactured for Clopay Building Products Company. Each door is provided as one complete unit including sections, brackets, tracks, counterbalance mechanisms, hardware (list options) to suit the opening and headroom available. Standard maximum size 24' 2" x 18'.

Materials and Construction – Model 812 section frames shall be formed of 1-1/2" or 1-7/8" thick aluminum extrusions. The standard screen material shall be 304 stainless steel in 12 x 12, .023" diameter mesh. The fine screen material shall be 304 stainless steel in 30 x 30, .011" diameter mesh.

Finish – Door to have a mill aluminum finish. The frame in powder coat paint finishes is optional.


Hardware – All hinges and brackets to be standard commercial grade. Ten ball, long-stem, steel rollers, full floating in case-hardened steel races, mounted to fit the taper of the track.

Track – Vertical tracks to be a minimum of 16 ga. galvanized steel tapered and mounted for wedge-type closing. Horizontal tracks to be minimum 14 ga. galvanized steel, reinforced with minimum 13 ga. galvanized angles as required. Optional track switch available for single vertical track installations. 2" or 3" track as required.

Spring Counterbalance – Door assembly to be operated by a torsion spring counterbalance mechanism, with a helically wound, oil tempered torsion spring mounted on a galvanized steel tube or a solid steel shaft as required. Springs shall have a minimum 15,000 cycle life. Cable drums are die cast aluminum with minimum 5:1 safety factor. Lift cables are high strength galvanized aircraft cable with minimum 7:1 safety factor.


Locking – Inside spring loaded slide bolt lock on end stile shall engage slot in track.

DISTRIBUTED BY:

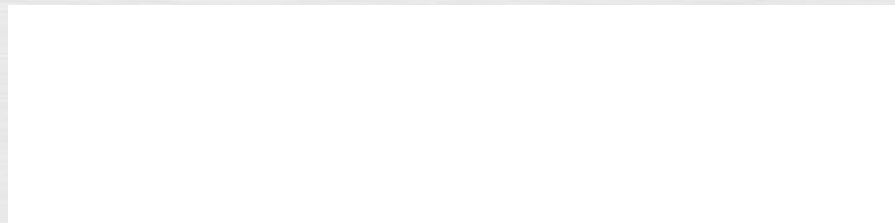

OPTIONS

- A. High Cycle Spring – Available in 25,000; 50,000; 100,000 cycles.
- B. Track – Vertical lift and high lift track types available. Track switch available for single vertical track installations.
- C. Weatherstripping – Complete perimeter seals available.
- D. Installation – Install door including sections, brackets, guides, track, etc. in accordance with final shop drawing (if required) and instructions by Clopay.

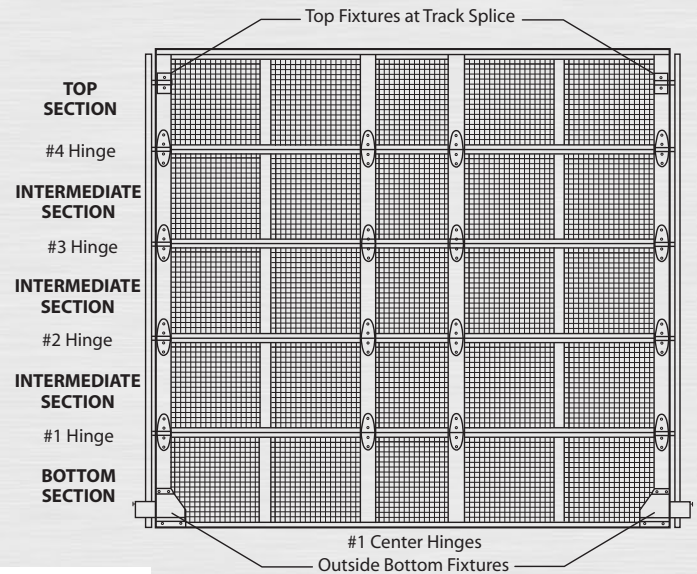

For special applications and options, consult Commercial Information Assistance (CIA) at 1-800-526-4301.

